



Batavus Mambo Carrier Extender

Disclaimer: Have the accessories fitted by an official Batavus dealer.

You will need:

1. Flathead screwdriver
2. Cutting pliers
3. 2x Box wrench 10 mm
4. Torque wrench
5. Allen key 5 mm




Step 1: Stand the bicycle in a stable position.

Step 2: Open the flap on the reflector holder by pushing in the clip with a flathead screwdriver; inside there is an extra length of lighting cable. This is used to connect the rear light to the Batavus carrier extender.



Step 2: Open the flap.

Step 3: Unscrew the reflector holder and the Vizi rear light.


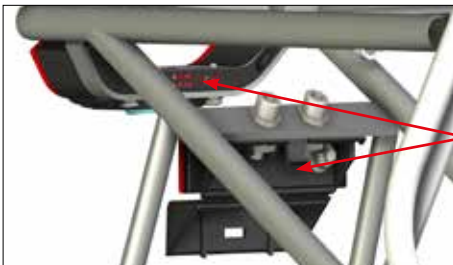


Step 3: Reflector holder and Vizi rear light.




Batavus Mambo Carrier Extender

Step 4: Fit the extender in position A and fasten hand-tight.

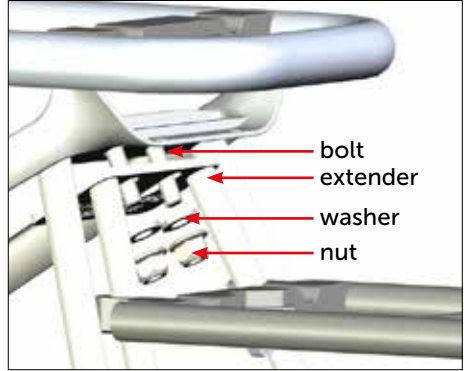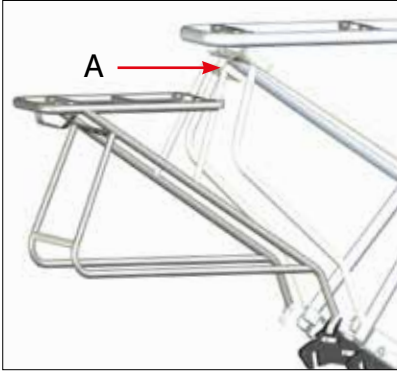

Step 5: Fit the carrier supports to the dropouts.



left-hand side



right-hand side


Step 6: Tighten all bolt connections to 8.8 Nm.



Batavus Mambo Carrier Extender

Step 7: Fit the reflector holder and Vizi rear light to the new carrier.

Step 8: Guide the lighting cable through the grommet and fit the 2 cable clamps.

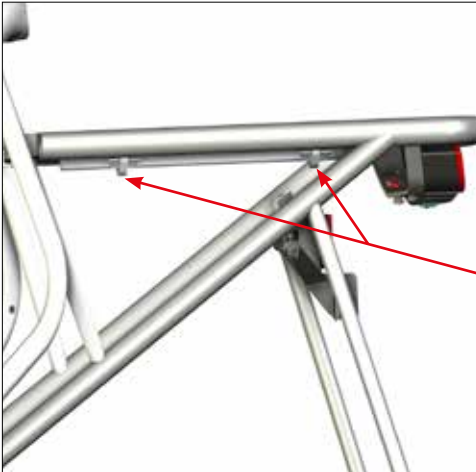

cable clamps

Step 9: Check that all bolts and nuts have been properly tightened and check that the light is working.



Scan QR code for instructions in Dutch, French, German, Danish or Swedish.

BATAVUS